




LUMINAIRE PHOTOMETRIC TEST REPORT

Report number:


MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

DATA OF LAMP		I _{max} (cd)	290.0	S/MH(C0/180)	1.52
MODEL	YL-CA03-15W-M	EFFICIENCY(%)	100.0	S/MH(C90/270)	1.52
NOMINAL POWER(W)	14	TOTAL FLUX(lm)	1808.7	Voltage(V)	218.3
RATED VOLTAGE(V)	218	EFFICIENCY(lm/W)	124.7	Current(A)	0.074
NOMINAL FLUX(lm)	1808.7	η up(%)	29.8	Power(W)	14.51
LAMPS QUANTITY	1	η down(%)	70.2	Power Factor(PF)	0.894
TEST VOLTAGE(V)	218.4	Effective Flux(lm)	1800.8	EEI	0.110

LUMINOUS INTENSITY DISTRIBUTION

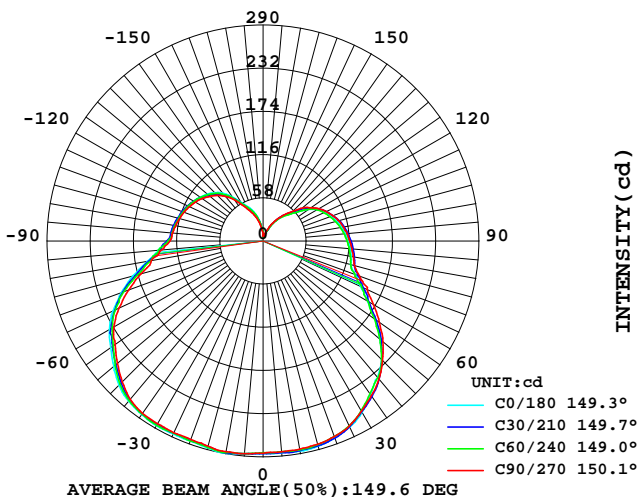

LUMINOUS INTENSITY DISTRIBUTION

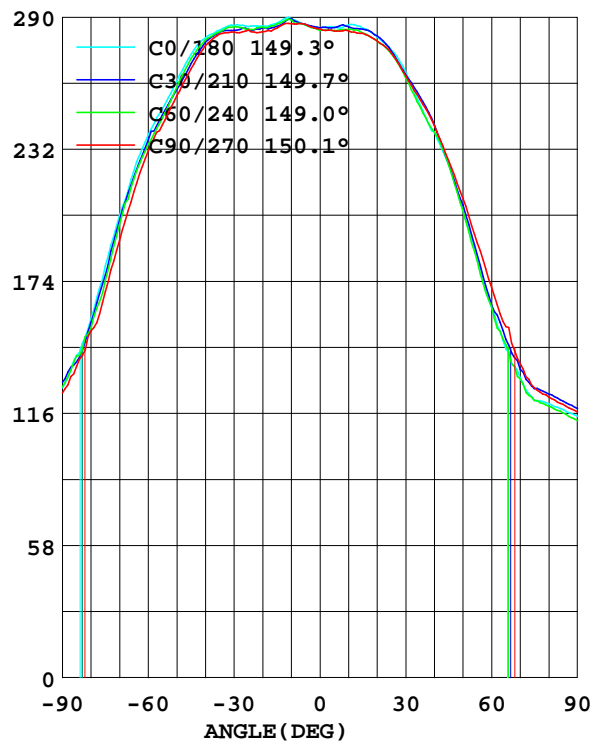


Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

AVERAGE AND CENTER E Figure

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

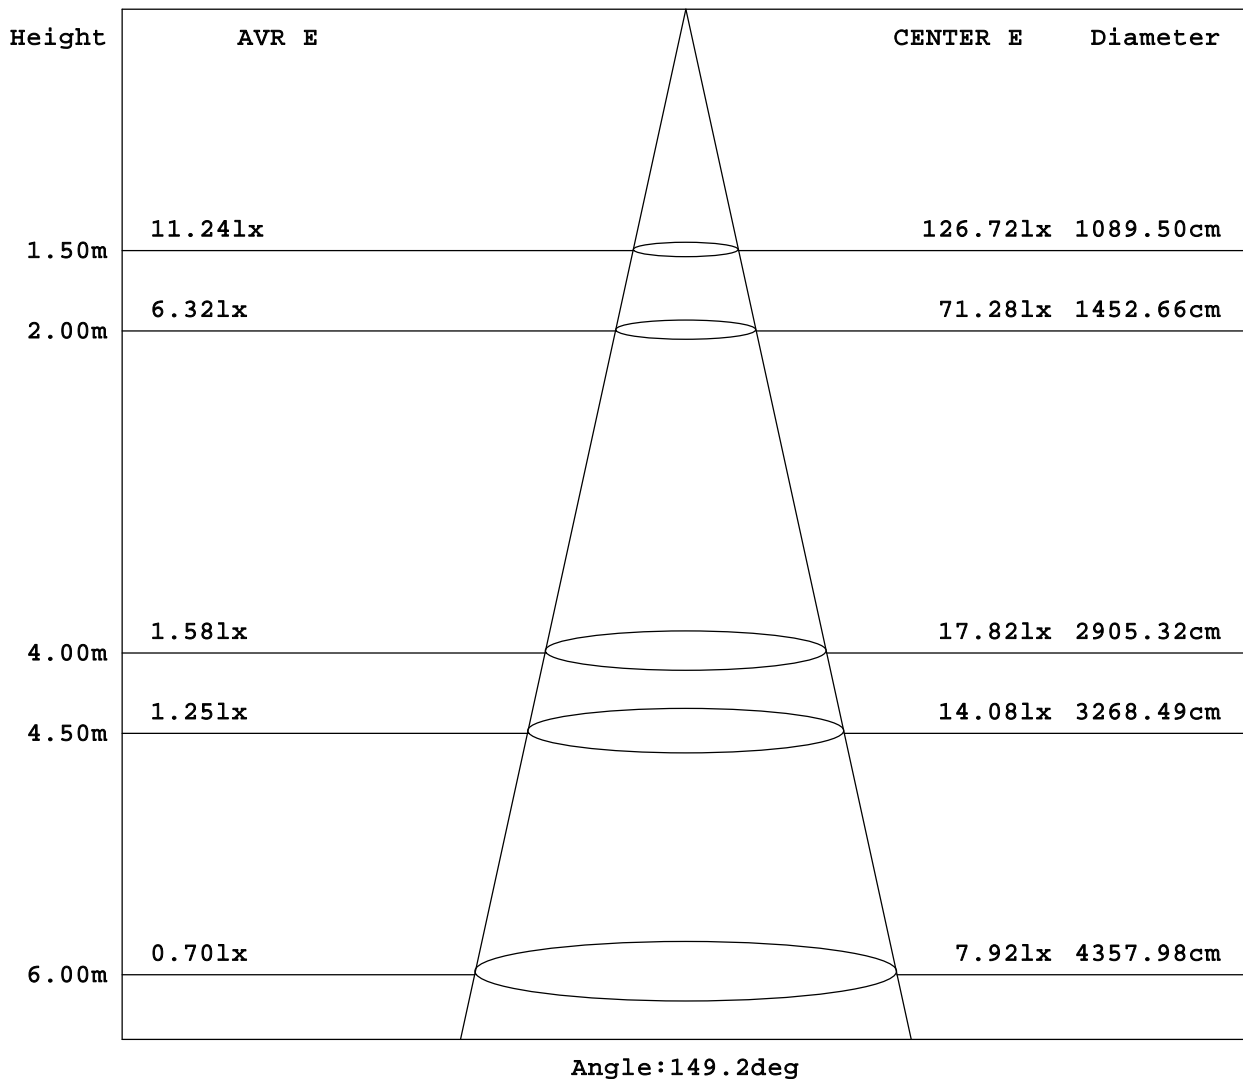

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

ZONAL FLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	zone	total
5.0	286.5	286.7	286.8	287.1	285.5	284.8	283.9	283.7	0- 5	6.823	6.823
10.0	289.4	289.1	287.1	285.8	286.6	285.2	284.0	283.7	5- 10	20.45	27.28
15.0	287.5	286.5	285.1	284.1	285.2	283.9	282.9	282.8	10- 15	33.87	61.16
20.0	286.2	285.6	283.6	284.0	281.3	280.7	279.6	280.4	15- 20	46.75	107.9
25.0	285.8	284.7	284.3	284.3	275.6	274.6	274.3	275.2	20- 25	58.99	166.9
30.0	286.3	285.0	283.5	284.0	265.8	264.1	264.4	265.6	25- 30	70.22	237.1
35.0	284.3	283.5	282.6	282.8	251.4	252.8	253.8	254.0	30- 35	79.98	317.1
40.0	280.8	279.4	277.5	278.4	239.6	241.1	242.3	243.1	35- 40	88.16	405.2
45.0	273.8	270.8	267.4	269.7	225.1	225.5	227.1	228.7	40- 45	94.33	499.6
50.0	261.9	258.8	255.6	257.0	205.1	206.2	210.3	211.2	45- 50	97.38	596.9
55.0	249.8	246.4	242.8	242.4	184.5	184.0	190.7	189.8	50- 55	97.70	694.7
60.0	238.3	235.2	231.3	228.5	162.7	163.4	171.5	168.9	55- 60	96.05	790.7
65.0	222.7	219.4	213.4	209.2	144.2	147.3	154.1	152.7	60- 65	92.91	883.6
70.0	203.0	199.8	191.7	189.7	131.6	133.3	137.8	136.7	65- 70	88.14	971.8
75.0	180.9	175.7	169.6	167.4	121.8	124.3	127.3	123.9	70- 75	81.84	1054
80.0	157.8	154.7	152.3	148.8	120.2	121.8	123.2	121.0	75- 80	76.33	1130
85.0	141.4	139.9	136.6	134.3	117.7	118.8	119.9	117.8	80- 85	71.95	1202
90.0	127.2	128.7	125.0	124.1	114.7	115.5	116.5	114.9	85- 90	68.06	1270
95.0	123.0	123.5	122.2	121.4	111.3	112.0	113.4	111.6	90- 95	65.05	1335
100.0	120.5	121.5	119.3	118.8	107.3	108.1	109.6	107.9	95-100	62.92	1398
105.0	117.5	118.4	116.3	115.9	102.7	103.6	105.4	103.8	100-105	60.13	1458
110.0	114.6	115.2	113.1	112.6	97.32	98.02	99.79	98.93	105-110	56.67	1515
115.0	111.3	111.6	109.2	109.0	91.30	92.12	93.96	93.26	110-115	52.60	1567
120.0	107.5	107.3	105.0	105.0	84.52	85.44	86.99	87.59	115-120	48.13	1616
125.0	103.2	102.3	99.66	99.47	74.25	76.12	78.31	79.42	120-125	42.95	1658
130.0	98.08	96.40	93.58	93.83	61.20	63.67	69.06	68.84	125-130	36.98	1695
135.0	92.19	90.06	86.99	86.58	51.82	53.12	57.08	57.05	130-135	30.81	1726
140.0	84.08	81.07	78.18	76.66	44.35	45.20	47.39	48.24	135-140	25.00	1751
145.0	72.80	70.29	67.86	64.28	36.17	37.51	38.77	40.55	140-145	19.48	1771
150.0	60.13	58.60	56.01	53.54	28.19	28.73	30.35	32.37	145-150	14.25	1785
155.0	51.95	49.99	46.38	45.39	18.50	19.38	22.74	23.72	150-155	9.909	1795
160.0	44.92	42.73	38.46	37.38	12.48	13.02	15.01	15.49	155-160	6.505	1801
165.0	36.55	34.84	30.73	29.33	8.553	8.395	10.07	8.490	160-165	3.981	1805
170.0	27.49	25.62	22.55	21.09	6.146	6.241	6.779	6.209	165-170	2.113	1808
175.0	18.05	16.82	14.82	13.78	6.209	6.146	6.589	6.114	170-175	0.936	1808
180.0	10.20	10.01	8.870	8.490	9.757	9.947	8.997	8.363	175-180	0.242	1809
DEG	LUMINOUS INTENSITY:cd									UNIT:lm	


Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

LUMINANCE LIMITATION CURVES

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

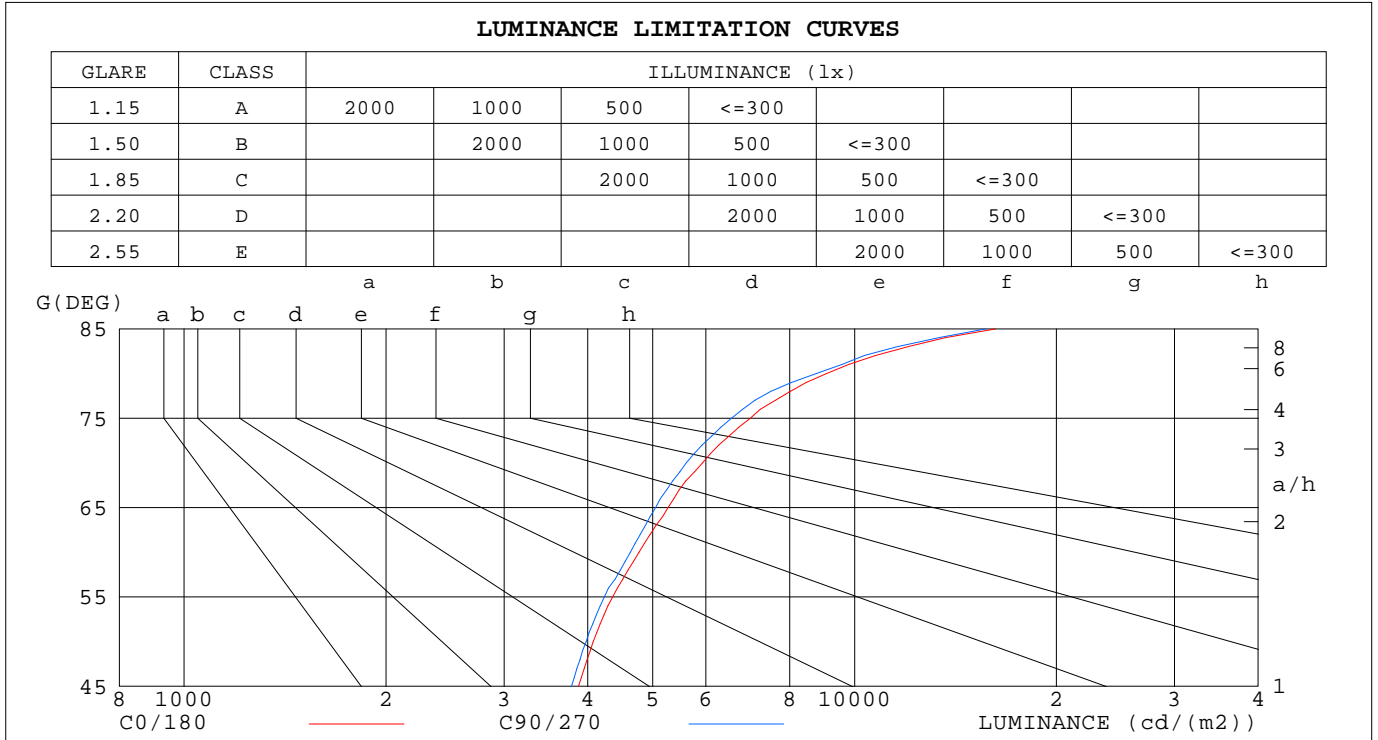

LUMINANCE cd/m2		
G (DEG)	C0/180	C90/270
85	16234	15681
80	9089	8775
75	6992	6554
70	5936	5608
65	5270	5050
60	4767	4628
55	4356	4233
50	4075	3976
45	3873	3782

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日


Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

UNIT: cd

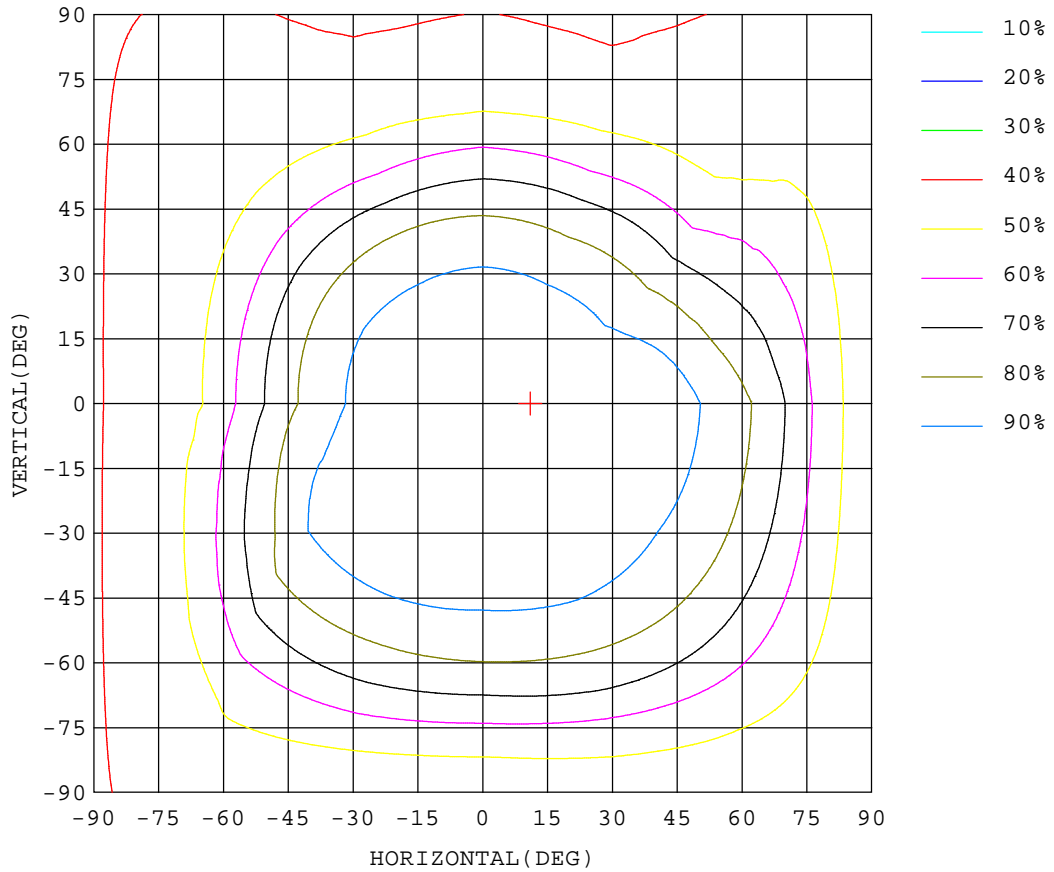


Test System:HOPOO HPG1800
Temperature:25.3DEG
Operators:
Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
Humidity:65.0%
Test Distance:7.960 m
Remarks: 2200K

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

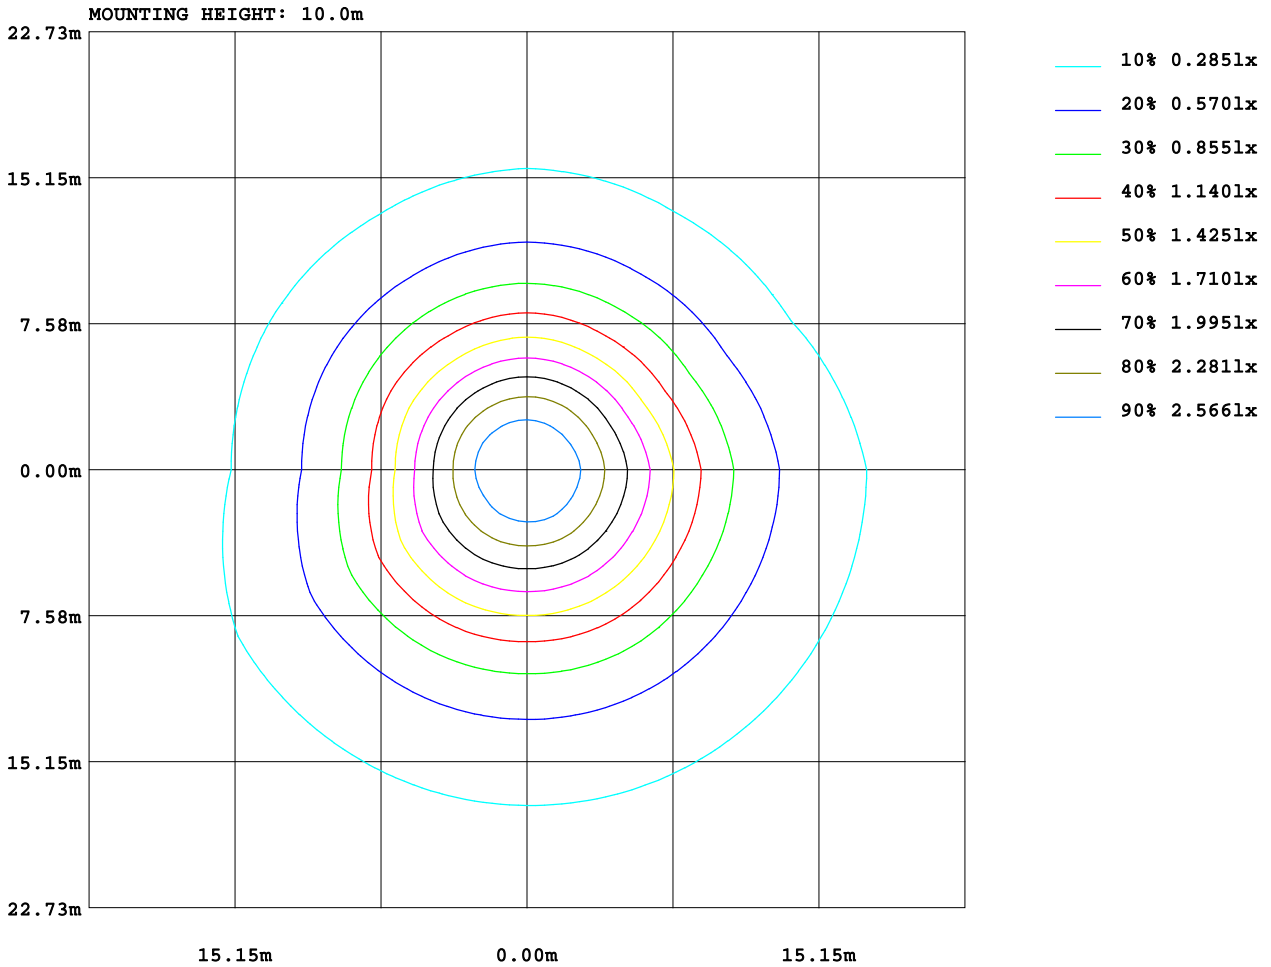

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

AREA LUMINOUS FLUX

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

VERTICAL (DEG)	AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
	0.31	0.92	1.52	2.07	2.53	2.90	3.21	3.46	3.61	3.60	3.45	3.19	2.88	2.51	2.06	1.55	0.98	0.33	41.1	41.1	
90	0.31	0.94	1.56	2.14	2.63	3.02	3.36	3.67	3.86	3.86	3.67	3.36	3.01	2.61	2.12	1.61	1.01	0.34	43.1	43.1	
80	0.31	0.95	1.59	2.20	2.77	3.31	3.83	4.30	4.60	4.62	4.35	3.91	3.38	2.80	2.20	1.68	1.05	0.35	48.2	48.2	
70	0.31	0.96	1.61	2.34	3.11	3.90	4.62	5.29	5.71	5.73	5.34	4.71	4.01	3.23	2.45	1.81	1.10	0.36	56.6	56.6	
60	0.31	0.96	1.66	2.54	3.54	4.62	5.62	6.40	6.82	6.82	6.42	5.70	4.77	3.70	2.80	2.00	1.15	0.36	66.2	66.2	
50	0.31	0.97	1.73	2.75	4.02	5.34	6.45	7.19	7.63	7.63	7.18	6.48	5.48	4.26	3.21	2.21	1.22	0.37	74.5	74.5	
40	0.31	0.97	1.80	2.96	4.42	5.86	6.98	7.80	8.25	8.25	7.81	7.02	6.01	4.85	3.61	2.43	1.29	0.38	81.0	81.0	
30	0.31	0.98	1.85	3.12	4.69	6.15	7.36	8.20	8.55	8.54	8.19	7.46	6.51	5.34	3.96	2.62	1.36	0.38	85.6	85.6	
20	0.31	0.98	1.88	3.21	4.81	6.27	7.55	8.35	8.64	8.61	8.36	7.78	6.91	5.72	4.25	2.79	1.41	0.39	88.2	88.2	
10	0.32	0.99	1.94	3.32	4.97	6.42	7.64	8.34	8.67	8.71	8.42	7.87	7.07	5.85	4.35	2.85	1.43	0.39	89.6	89.6	
0	0.32	1.01	2.03	3.48	5.16	6.67	7.76	8.34	8.64	8.66	8.37	7.85	7.01	5.75	4.29	2.81	1.41	0.38	90.0	90.0	
-10	0.32	1.03	2.07	3.55	5.25	6.78	7.77	8.36	8.60	8.61	8.37	7.80	6.85	5.56	4.18	2.73	1.38	0.38	89.6	89.6	
-20	0.32	1.04	2.07	3.54	5.19	6.53	7.58	8.26	8.54	8.54	8.26	7.60	6.56	5.33	4.02	2.61	1.33	0.38	87.7	87.7	
-30	0.32	1.03	2.02	3.43	4.88	6.07	7.06	7.76	8.09	8.10	7.80	7.12	6.16	5.05	3.77	2.44	1.26	0.37	82.8	82.8	
-40	0.32	1.02	1.93	3.17	4.40	5.51	6.41	7.03	7.35	7.37	7.09	6.53	5.69	4.63	3.44	2.24	1.20	0.36	75.7	75.7	
-50	0.32	1.00	1.83	2.82	3.82	4.77	5.57	6.12	6.42	6.46	6.23	5.74	4.97	4.03	3.02	2.03	1.13	0.36	66.7	66.7	
-60	0.31	0.98	1.72	2.51	3.25	3.95	4.53	4.93	5.14	5.16	5.00	4.63	4.07	3.39	2.62	1.83	1.08	0.35	55.5	55.5	
-70	0.31	0.95	1.61	2.25	2.82	3.31	3.71	3.99	4.14	4.17	4.06	3.82	3.43	2.93	2.35	1.72	1.03	0.34	47.0	47.0	
-80	0.31	0.95	1.61	2.25	2.82	3.31	3.71	3.99	4.14	4.17	4.06	3.82	3.43	2.93	2.35	1.72	1.03	0.34	47.0	47.0	
-90	0.31	0.95	1.61	2.25	2.82	3.31	3.71	3.99	4.14	4.17	4.06	3.82	3.43	2.93	2.35	1.72	1.03	0.34	47.0	47.0	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90	
Φ t	5.65	17.7	32.5	51.4	72.3	91.4	107	118	123	124	118	109	94.8	77.6	58.7	40.0	21.8	6.56	1809		
Φ a	5.65	17.7	32.5	51.4	72.3	91.4	107	118	123	124	118	109	94.8	77.6	58.7	40.0	21.8	6.56		1801	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日


Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.12	1.12	1.12	1.06	1.06	1.06	.95	.95	.95	.84	.84	.84	.75	.75	.75	.70
1.0	.93	.87	.83	.88	.83	.78	.78	.74	.70	.69	.66	.63	.60	.58	.56	.52
2.0	.79	.71	.65	.75	.68	.62	.66	.61	.56	.58	.54	.50	.51	.48	.45	.41
3.0	.69	.60	.52	.65	.57	.50	.57	.51	.45	.51	.45	.41	.44	.40	.37	.33
4.0	.60	.51	.44	.57	.48	.42	.50	.43	.38	.44	.39	.34	.39	.34	.31	.27
5.0	.53	.44	.37	.50	.42	.35	.45	.38	.32	.40	.34	.29	.35	.30	.26	.23
6.0	.47	.38	.32	.45	.36	.30	.40	.33	.28	.36	.30	.25	.31	.26	.23	.20
7.0	.43	.34	.27	.40	.32	.26	.36	.29	.24	.32	.26	.22	.28	.24	.20	.17
8.0	.39	.30	.24	.37	.29	.23	.33	.26	.21	.29	.24	.19	.26	.21	.18	.15
9.0	.35	.27	.21	.33	.26	.21	.30	.24	.19	.27	.21	.17	.24	.19	.16	.14
10.0	.32	.24	.19	.31	.23	.18	.28	.21	.17	.25	.19	.16	.22	.18	.14	.12

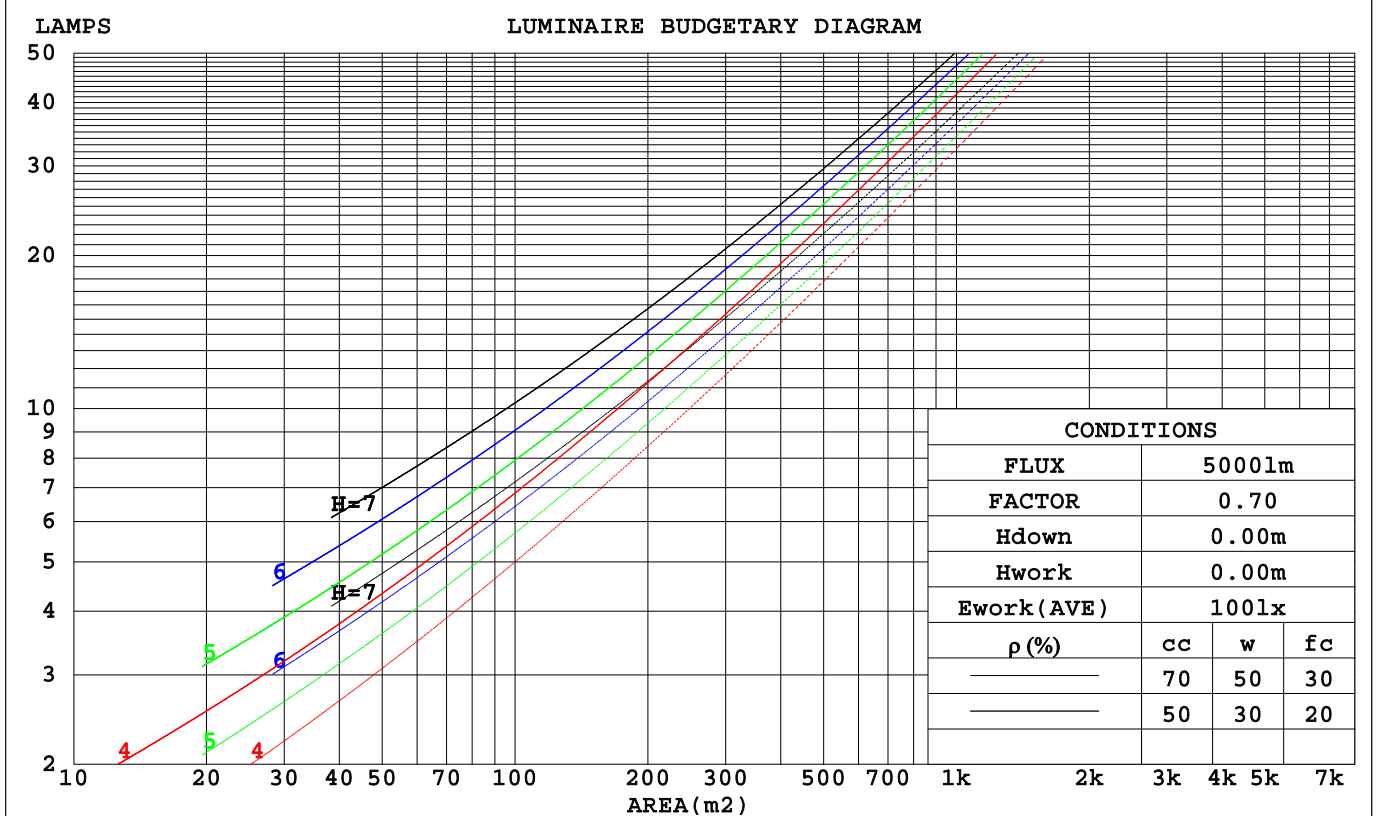

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

WEC AND CCEC

Report number:

MANUFACTURER:											
Address:											
NAME: CA03						TYPE:			WEIGHT:		
SPECIFICATION:						DIMENSION:			SERIAL No.:		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.386	.219	.069	.369	.211	.067	.339	.194	.062	.311	.179	.058	.285	.165	.053	
2.0	.331	.181	.056	.316	.174	.054	.289	.160	.050	.263	.148	.046	.239	.135	.043	
3.0	.293	.156	.047	.280	.150	.045	.254	.138	.042	.231	.127	.039	.210	.116	.036	
4.0	.263	.137	.040	.251	.131	.039	.228	.121	.036	.207	.111	.034	.187	.102	.031	
5.0	.239	.122	.035	.228	.117	.034	.207	.108	.032	.188	.099	.029	.169	.090	.027	
6.0	.219	.110	.031	.209	.106	.030	.190	.097	.028	.172	.089	.026	.155	.081	.024	
7.0	.202	.100	.028	.193	.096	.027	.175	.088	.025	.158	.081	.024	.143	.074	.022	
8.0	.187	.092	.026	.179	.088	.025	.162	.081	.023	.147	.074	.021	.132	.068	.020	
9.0	.175	.084	.024	.167	.081	.023	.151	.075	.021	.137	.069	.020	.124	.063	.018	
10.0	.163	.078	.022	.156	.075	.021	.142	.069	.020	.128	.064	.018	.116	.058	.017	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.417	.417	.417	.357	.357	.357	.243	.243	.243	.140	.140	.140	.045	.045	.045	
1.0	.414	.384	.357	.355	.330	.307	.243	.227	.213	.140	.131	.124	.045	.042	.040	
2.0	.408	.362	.324	.349	.312	.280	.239	.216	.195	.138	.125	.114	.044	.041	.037	
3.0	.401	.346	.303	.343	.299	.262	.236	.207	.184	.136	.121	.108	.044	.039	.036	
4.0	.393	.334	.289	.337	.289	.251	.232	.201	.177	.134	.118	.105	.043	.038	.034	
5.0	.385	.324	.279	.331	.281	.243	.228	.196	.172	.132	.115	.102	.043	.038	.034	
6.0	.378	.317	.272	.325	.274	.237	.224	.192	.168	.130	.113	.100	.042	.037	.033	
7.0	.371	.310	.267	.319	.269	.233	.221	.189	.165	.128	.111	.098	.041	.036	.033	
8.0	.365	.305	.264	.314	.264	.230	.217	.186	.163	.126	.110	.097	.041	.036	.032	
9.0	.359	.300	.261	.309	.261	.227	.214	.183	.161	.125	.108	.096	.040	.035	.032	
10.0	.353	.296	.258	.304	.257	.225	.211	.181	.160	.123	.107	.096	.040	.035	.032	

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

Uncorrected UGR Table

Report number:

MANUFACTURER:										
Address:										
NAME: CA03					TYPE:			WEIGHT:		
SPECIFICATION:					DIMENSION:			SERIAL No.:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.7	18.0	17.4	18.6	19.4	16.6	17.9	17.3	18.5	19.3
3H	19.3	20.4	19.9	21.1	21.9	19.1	20.2	19.8	20.9	21.7
4H	20.6	21.7	21.3	22.4	23.2	20.4	21.4	21.1	22.1	23.0
6H	22.0	23.0	22.7	23.7	24.6	21.7	22.7	22.4	23.5	24.3
8H	22.7	23.7	23.5	24.4	25.3	22.5	23.5	23.2	24.2	25.1
12H	23.6	24.6	24.3	25.3	26.2	23.4	24.3	24.1	25.1	26.0
4H 2H	17.5	18.6	18.2	19.3	20.2	17.5	18.6	18.2	19.3	20.1
3H	20.2	21.2	21.0	21.9	22.8	20.1	21.1	20.8	21.8	22.7
4H	21.7	22.6	22.5	23.3	24.3	21.5	22.4	22.3	23.1	24.1
6H	23.3	24.0	24.0	24.8	25.8	23.0	23.8	23.8	24.6	25.6
8H	24.1	24.8	24.9	25.6	26.6	23.9	24.6	24.7	25.4	26.4
12H	25.1	25.8	25.9	26.6	27.6	24.9	25.6	25.7	26.4	27.4
8H 4H	22.2	22.9	23.0	23.7	24.7	22.1	22.8	22.9	23.6	24.6
6H	24.0	24.7	24.9	25.5	26.5	23.9	24.5	24.7	25.3	26.3
8H	25.1	25.6	25.9	26.5	27.5	24.9	25.5	25.8	26.3	27.3
12H	26.3	26.8	27.2	27.6	28.7	26.2	26.6	27.0	27.5	28.6
12H 4H	22.3	23.0	23.1	23.8	24.8	22.2	22.8	23.0	23.7	24.7
6H	24.3	24.8	25.1	25.7	26.7	24.1	24.7	24.9	25.5	26.5
8H	25.4	25.9	26.3	26.7	27.8	25.3	25.7	26.1	26.6	27.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117 Corrected 1809 lm Total Lamp Luminous Flux. (8log(F/F0) = 2.1)

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

UTILIZATION FACTORS TABLE

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	44	31	24	42	31	24	40	29	23	16
0.80	53	39	31	51	38	31	47	36	29	21
1.00	60	47	38	58	46	38	53	45	36	26
1.25	67	54	45	64	52	44	59	49	42	31
1.50	72	60	51	69	58	49	63	53	46	34
2.00	80	68	60	76	65	58	69	60	54	40
2.50	85	74	65	80	71	63	72	65	58	43
3.00	88	79	71	84	75	68	75	68	63	46
4.00	93	85	78	88	81	75	79	73	68	50
5.00	96	89	83	91	85	79	82	77	72	53
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			


Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

ISOCANDELA DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

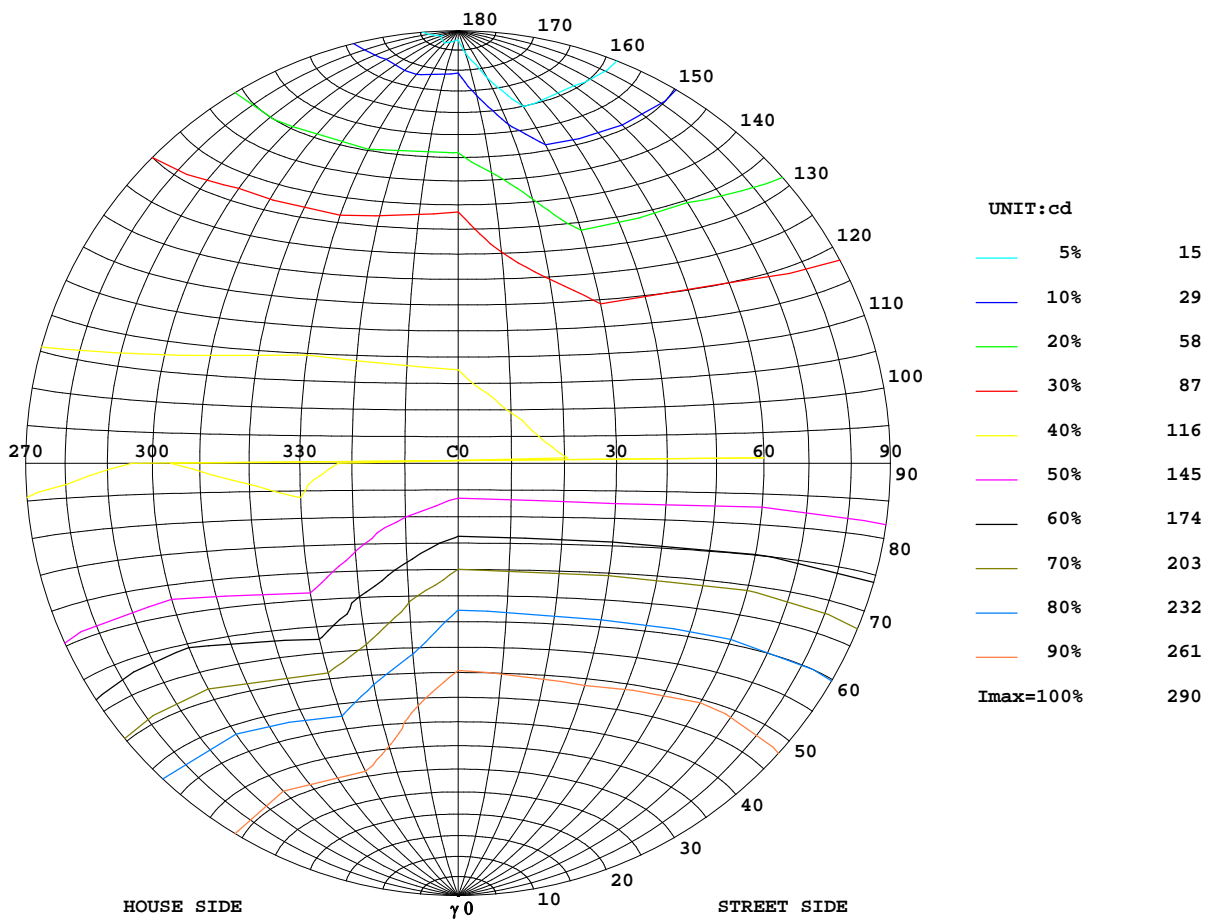

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日


Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K

ISOLUX DIAGRAM

Report number:

MANUFACTURER:		
Address:		
NAME: CA03	TYPE:	WEIGHT:
SPECIFICATION:	DIMENSION:	SERIAL No.:

ILLUMINANCE AT MH=10 m, Enadir = 2.85 lx

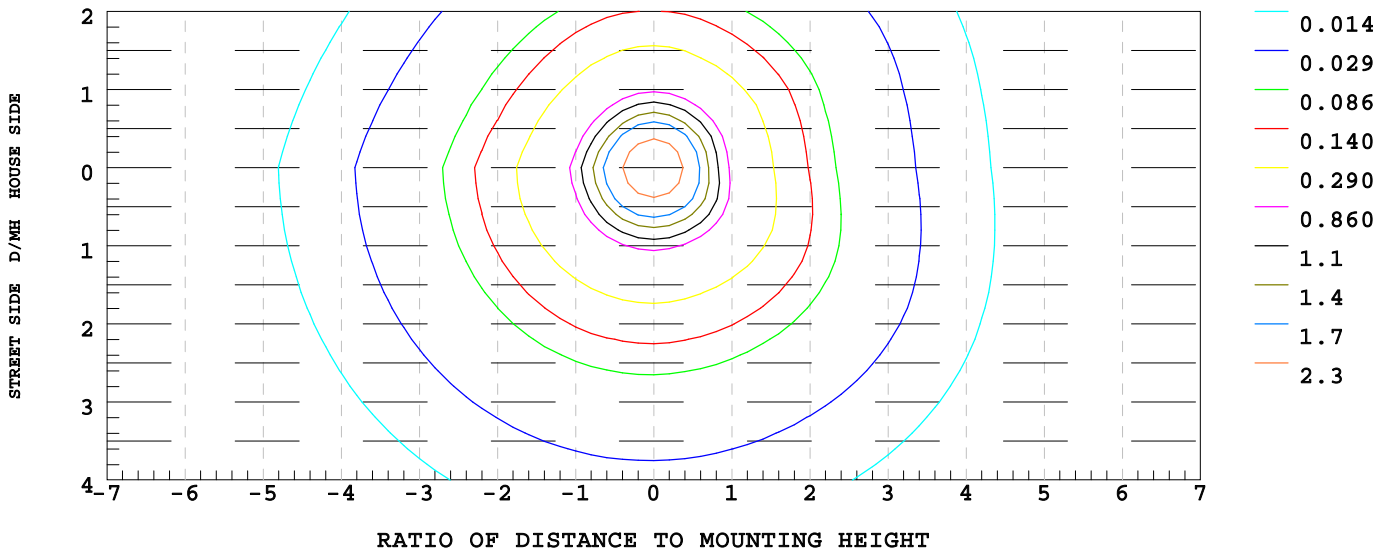

Test System:HOPOO HPG1800
 Temperature:25.3DEG
 Operators:
 Test Date:2022年02月028日

Test Set: 5.0deg/s C-Gamma (TYPE C)
 Humidity:65.0%
 Test Distance:7.960 m
 Remarks: 2200K