

**APPLICATION:**

This fully weatherproof LED unit is designed for use in areas of wet location. Designed to withstand direct contact with rain this unit is corrosion resistant and waterproof. This unit is ideal in areas such as car washes, store fronts, parking garages, kitchens, and chemical plants. Vapor tight unit is capable of being hosed down for easy cleaning.

**CONSTRUCTION:**

Exterior housing is designed for single piece injection molded fiberglass/ plastic combination blend. Neoprene gasket and stainless steel pressure locks ensure waterproof seal. Interior gear tray is heavy gauge die formed steel which hinges to allow electrical raceway access while remaining attached to luminaire housing during installation and maintenance.

**MOUNTING:**



Vapor tight unit available with an stainless steel external hanging bracket. VT Series is watertight and must be drilled and sealed for each surface mounting or chain hanging application.

Maximum Weight: 15lbs/48" 32lbs/96"

Mounting Brackets included.

**FEATURES AND BENEFITS:**

- Magnilumen high lumen output light engine
- **Color Rendering Index (CRI)** 83
- **Minimum Ambient Temp (°F)** -4
- **Maximum Ambient Temp (°F)** 122
- **Dimming** 0-10v
- **Rated Life (L70)** 100,000
- **Warranty** 5 years

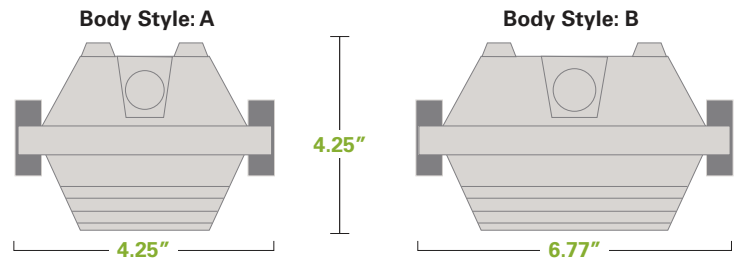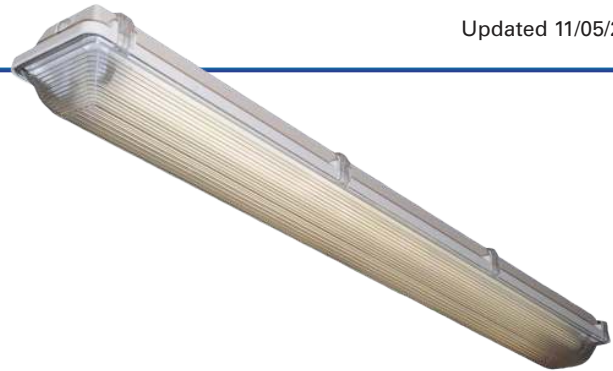

- **Voltage (V)** 120-277v
- **Operating Frequency (Hz)** 50/60
- **Powered by:**



	Part Number - (Body Style) - (Color)	Total Wattage	Board Qty/ Length	Lumens with/without board diffuser lens		Kelvin Temperature (must specify in part number)
				with	without	
2FT FIXTURES	ZL-CIT2-LED-2-(A/B)-MRK1210-(Color)	10W	1 - 2ft board	1200	1400	30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K
	ZL-CIT2-LED-2-(A/B)-MRK2220-(Color)	20W	2 - 2ft boards	2400	2840	
	ZL-CIT2-LED-2-(A/B)-MRK3220-(Color)	20W	3 - 2ft boards	2400	2840	
	ZL-CIT2-LED-2-(A/B)-MRK3230-(Color)	30W	3 - 2ft boards	3600	4260	
4FT FIXTURES	ZL-CIT2-LED-4-(A/B)-MRK1420-(Color)	20W	1 - 4ft board	2400	2840	30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K
	ZL-CIT2-LED-4-(A/B)-MRK2430-(Color)	30W	2 - 4ft boards	3600	4260	
	ZL-CIT2-LED-4-(A/B)-MRK2440-(Color)	40W	2 - 4ft boards	4800	5680	
	ZL-CIT2-LED-4-(A/B)-MRK2450-(Color)-HO	50W	2 - 4ft boards	6000	7100	
	ZL-CIT2-LED-4-(A/B)-MRK3440-(Color)	40W	3 - 4ft boards	4800	5680	
	ZL-CIT2-LED-4-(A/B)-MRK3450-(Color)	50W	3 - 4ft boards	6000	7100	
	ZL-CIT2-LED-4-(A/B)-MRK3460-(Color)	60W	3 - 4ft boards	7200	8520	
8FT FIXTURES	ZL-CIT2-LED-8-(A/B)-MRK2430-(Color)	30W	2 - 4ft boards	3600	4260	30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K
	ZL-CIT2-LED-8-(A/B)-MRK2440-(Color)	40W	2 - 4ft boards	4800	5680	
	ZL-CIT2-LED-8-(A/B)-MRK2450-(Color)	50W	2 - 4ft boards	6000	7100	
	ZL-CIT2-LED-8-(A/B)-2x-MRK2430-(Color)	60W	4 - 4ft boards	7200	8520	
	ZL-CIT2-LED-8-(A/B)-2x-MRK2440-(Color)	80W	4 - 4ft boards	9600	11,360	
	ZL-CIT2-LED-8-(A/B)-2x-MRK2450-(Color)-HO	100W	4 - 4ft boards	12,000	14,200	
	ZL-CIT2-LED-8-(A/B)-3x-MRK2430-(Color)-HO	90W	6 - 4ft boards	10,800	12,780	
	ZL-CIT2-LED-8-(A/B)-3x-MRK2440-(Color)-HO	120W	6 - 4ft boards	14,400	17,040	
	ZL-CIT2-LED-8-(A/B)-3x-MRK2450-(Color)-HO	150W	6 - 4ft boards	18,000	21,300	
	ZL-CIT2-LED-8-(A/B)-3x-MRK2460-(Color)-HO	120W	6 - 4ft boards	14,400	17,040	