

LED UNDER CABINET LIGHT WITH CCT SELECTABLE



APPLICATIONS

The LED Under Cabinet Light series is a next generation, direct wire under cabinet fixture that provides task or accent lighting in commercial, retail, hospitality, and residential applications.

PRODUCT FEATURES

WATTAGES	5W, 9W, 14W, 18W
COLOR TEMPS	30K, 40K selectable
LUMENS	80 lm/W (+/- 10%)
INPUT VOLTAGE	120VAC
CRI	90
BEAM ANGLE	117 degrees
LIFESPAN	50,000 hours
OPERATING TEMP	-22 - 113F
RATING	Damp location
WARRANTY	5 years

SPECIFICATIONS

PART #	WATTAGE	COLOR TEMPS	DIMENSIONS	LUMENS (+10%)	CERT.
UC-5W-9INCH-CCT-120V	5W	30K, 40K selectable	9" x 3.5"	81 lm/W	UL
UC-5W-12INCH-CCT-120V	5W	30K, 40K selectable	12" x 3.5"	81 lm/W	UL
UC-9W-18INCH-CCT-120V	9W	30K, 40K selectable	18" x 3.5"	77 lm/W	UL
UC-9W-21INCH-CCT-120V	9W	30K, 40K selectable	21" x 3.5"	77 lm/W	UL
UC-9W-24INCH-CCT-120V	9W	30K, 40K selectable	24" x 3.5"	77 lm/W	UL
UC-14W-33INCH-CCT-120V	14W	30K, 40K selectable	33" x 3.5"	78 lm/W	UL
UC-18W-42INCH-CCT-120V	18W	30K, 40K selectable	42" x 3.5"	74 lm/W	UL



Power Switch



Optical lens is made of high quality PC material to make the light even and soft.




High performance, galvanized steel heat sink transfers heat from the light engine to the environment, via large cooling fins, drawing heat away from the fixture, and extending the lifespan of the LEDs.






CCT Switch

PHOTOMETRICS

UC24IN09W12-34K

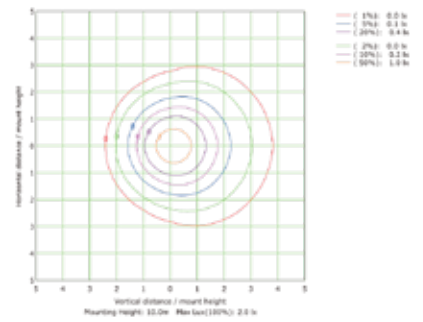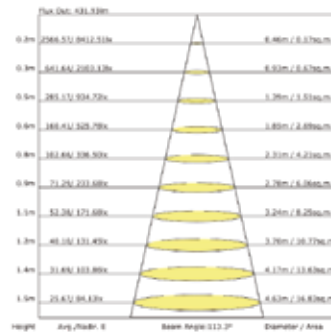

UC33IN014W12-34K

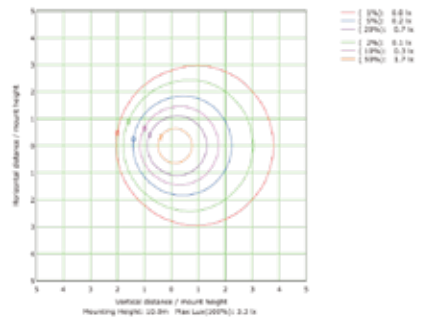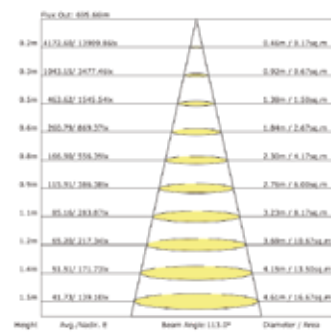

UC42IN018W12-34K

